

## N 4Way 0.5~6.0GHz

P.N. : D04-C3011-02



### Products feature

- World best performance in Insertion Loss Amplitude Unbalance.
- Specialized in 5G in the Sub-6GHz.
- 30Watt power test approved.
- Various application for the Telecommunication.



### Electrical specification

Item	Specification
Frequency range	0.5~6.0 GHz
Impedance (nominal)	50Ω
V.S.W.R Input / Output	1.45 : 1 (max)
Insertion Loss (max)	1.25 dB
Isolation (min)	10.5dB (0.5~0.7GHz) 18dB (0.7~6.0GHz)
Phase unbalance	± 3°
Amplitude unbalance	± 0.4 dB
Input Power	30 Watt

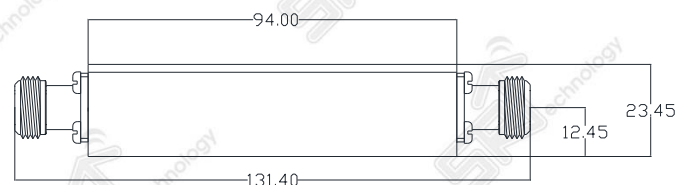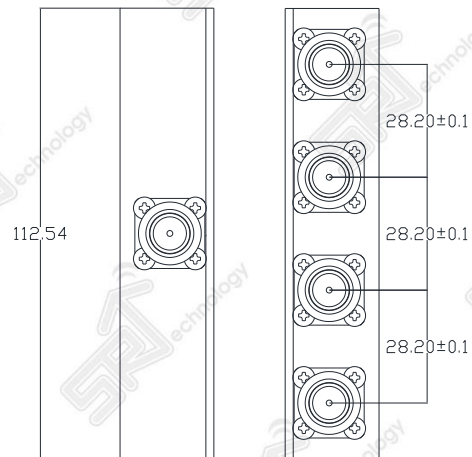

### Material specification

Item	Specification
Operating Temperature	-65°C ~ +85°C
Connector type	N female (jack)
Dimension	112.5 * 131.4 * 23.45 mm